

**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

Liber **9** Page **332**

For corners in

<u>INGHAM</u> (County)	Located In: <b>WHEATFIELD</b>	Corner Code # <b>TOWNSHIP</b>
1. Public Land Survey	T <u>3N</u> R <u>1E</u>	<u>A-7</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

**FILED**

980047763  
 09/18/1998 13:29:27  
**REGISTER OF DEEDS**  
 Paula Johnson  
 INGHAM COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

I, RON HELSEL, in a field survey on JULY 8, 1998 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:


A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	18	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

**NOTE: Not more that 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
 ORIGINAL MONUMENT: POST SET BY U.S. DEPUTY SURVEYOR, JOSEPH WAMPLER, MAR., 1826. WITNESSED AS: SUGAR 6", S66E, 6 1/2 LINKS; LYNN 33", N59E, 46 LINKS.  
 1) LIBER 4, PAGE 99 OF CORNERS, DATED JUNE 9, 1977, G. YOUNG P.S. NO. 17640, "SET CORNER ON SECTION LINE AT A PRORATED DISTANCED MEASURED BETWEEN SW CORNER SECTION 19 & NW CORNER SECTION 18, T3N, R1E. SET 1/2" REROD WITH CAP."  
 #16 NAIL & CAP IN 18" ASH, N20E, 148.65' (GONE)  
 #16 NAIL & CAP IN 18" ASH, N40E, 52.12' (FOUND)  
 #16 NAIL & CAP IN 15" ASH, N80E, 107.25' (FOUND)  
 2) P.A. 345 SURVEY, LIBER 3, PAGE 19, DATED 6-18-1977 BY G. YOUNG CALLED FOR THE SAME WITNESSES AND CORNER AS ABOVE.  
 3) P.A. 345 SURVEY, LIBER 7, PAGES 233-235, DATED 5-13-1993 BY D. LOHR #30090, "FD. 1/2" IRON, 2' DEEP, 2 FT. WEST C/L MERIDIAN ROAD AND 4' NORTH C/L HOLT ROAD."  
 RESET N&T 30090 24" ASH, N77E, 107.25' (FOUND)  
 SET N&T 30090 8" PINE, S64E, 82.24' (FOUND)  
 RESET N&T 30090 24" ASH, N14E, 148.65' (GONE)  
 SET N&T 30090 12" TREE N19E, 108.90' (FOUND MAPLE TREE)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
 FOUND A 1/2" REBAR 2 FEET WEST OF C/L MERIDIAN ROAD AND 3.5 FEET NORTH OF THE C/L OF HOLT ROAD TO THE EAST. TRAVERSE DETERMINED THE BAR TO BE ON THE STANDARD LINE BETWEEN M-7 AND M-6 OF ALAIEDON TWP., T3N, R1W OF THE PRINCIPLE MERIDIAN. EXCAVATED DOWN THROUGH 3 LAYERS OF ASPHALT ABOUT 3 FEET TO THE CLAY ROAD BED. DID NOT FIND ANY EVIDENCE OF A PREVIOUS CORNER. ACCEPTED THE POSITION OF THE BAR AS FAITHFUL PERPETUATION OF THE CORNER AND REPLACED IT WITH A 3/4" X 24" FORM PIN AND DISK STAMPED P.A. 345, P.S. 18994 IN A MONUMENT BOX AT THE SURFACE OF MERIDIAN ROAD.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
 3/4" IRON FORM PIN AND AN INGHAM COUNTY DISK IN A MONUMENT BOX 2 FEET WEST C/L OF MERIDIAN ROAD.  
 FOUND NAIL & TAG # 30090, N/SIDE 8" PINE, AZ. 126°, 82.26 FEET  
 SET NAIL & TAG NO. 18994, W/SIDE 24" ASH, AZ. 52°, 51.50 FEET  
 SET NAIL & TAG NO. 18994, W/SIDE 14" MAPLE, AZ. 27°, 108.70 FEET  
 SET NAIL & TAG NO. 18994, S/SIDE 20" ASH, AZ. 83°, 107.19 FEET  
 FACE OF 6" STEEL POST IN CONC., AZ. 123°, 70.65'  
 MEASURED SOUTH, 1553.04 FEET TO M-7 OF T3N, R1W  
 MEASURED NORTH, 2634.79 FEET TO A-6  
 MEASURED NORTH, 1085.56 FEET TO M-6 OF T3N, R1W

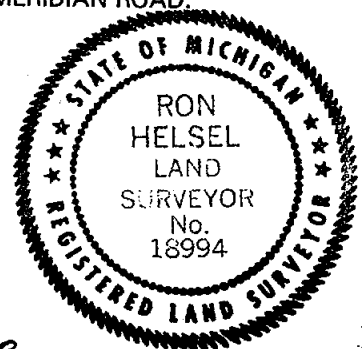

Signed by Ron Helsel Date Aug. 8, 1998  
 Surveyor's Michigan License No. 18994

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

Liber

9 Page 333

For corners in

INGHAM Located In: WHEATFIELD TOWNSHIP Corner Code #  
(County)

1. Public Land Survey T 3N R 1E C-6  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_

2. Property Controlling S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
in Section S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

3. Miscellaneous S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
Property in Sec. S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

**FILED**

980047784  
09/18/1998 13:20:29  
REGISTER OF DEEDS  
Paula Johnson  
INGHAM COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, RON HELSEL, in a field survey on JULY 1, 1998 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
ORIGINAL MONUMENT: POST SET BY JOSEPH WAMPLER, U.S. DEPUTY SURVEYOR, MAR., 1826. WITNESSED AS: BEECH 18", S70W, 2 LINKS; BEECH, 17", S84E, 19 LINKS  
1) A MARGIN NOTE IN THE INGHAM COUNTY COPY OF THE G.L.O. NOTES CALLS FOR A STONE. NO DATE GIVEN AND INITIALED ILLEGIBLY.  
2) I DID NOT FIND ANY RECORDS PUBLIC OR PRIVATE THAT CALLS FOR THIS CORNER.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
FOUND A 3-WAY FENCE TO THE NORTH, SOUTH AND EAST WITH A 2" BY 2" ANGLE IRON ANCHOR POST ENCASED IN A 5 FOOT DIAMETER CONCRETE BASE. FOUND A PLOW POINT AND A 15" X 8" DIAMETER POINTED BLUE STONE LYING ON THE GROUND NEXT TO THE ANCHOR POST, ALONG WITH SEVERAL SMALLER STONES POSITIONED IN A CIRCLE AROUND IT. ALSO FOUND THE ROTTED REMAINS OF AN OLD WOOD ANCHOR POST AND A PIECE OF OXIDIZED PIPE ABOUT 4" LONG. I BELIEVE THAT THE STONE, SECTION OF PIPE, AND PLOW POINT WAS REMOVED WHEN THE ANGLE IRON ANCHOR POST WAS SET. ACCEPTED THE POSITION OF THE NORTHWEST CORNER OF THE STEEL POST AS FAITHFUL PERPETUATION OF AN UNRECORDED COUNTY SURVEYOR MARKER. SET A 3/4" FORM PIN AND DISK STAMPED P.A. 345, P.S. 18994, 2.84 FEET WEST OF THE ANCHOR POST TO CONFORM WITH P.A. 74.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
NORTHWEST CORNER OF A 2" x 2" STEEL ANCHOR POST AT INTERSECTION OF FENCES TO EAST, NORTH, AND SOUTH  
3/4" BY 24" FORM PIN AND ALUMINUM DISK, WEST, 2.84 FEET  
SET NAIL & TAG #18994 ON N/SIDE OF 10" MAPLE, AZ. 87°, 57.5 FEET  
SET NAIL & TAG #18994 ON N/SIDE OF TWIN 18" OAK, AZ. 95°, 9.35 FEET  
SET NAIL & TAG #18994 ON E/SIDE OF 6" ELM, AZ. 04°, 6.40 FEET  
SET NAIL & TAG #18994 ON E/SIDE OF 4" THORN APPLE, AZ. 339°, 12.95 FEET

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													



Signed by Ron Helsel Date Aug 7, 1998  
Surveyor's Michigan License No. 18994

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

Liber 9 Page 334

For corners in

INGHAM Located In: WHEATFIELD TOWNSHIP  
(County) Corner Code #

- |                                       |                         |            |
|---------------------------------------|-------------------------|------------|
| 1. Public Land Survey                 | T <u>3N</u> R <u>1E</u> | <u>C-7</u> |
|                                       | T _____ R _____         | _____      |
|                                       | T _____ R _____         | _____      |
|                                       | T _____ R _____         | _____      |
| 2. Property Controlling<br>in Section | S _____ T _____ R _____ | _____      |
|                                       | S _____ T _____ R _____ | _____      |
| 3. Miscellaneous<br>Property in Sec.  | S _____ T _____ R _____ | _____      |
|                                       | S _____ T _____ R _____ | _____      |

**FILED**

980047785  
09/10/1998 13:20:31  
REGISTER OF DEEDS  
Paula Johnson  
INGHAM COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, RON HELSEL, in a field survey on OCTOBER, 1997 & JULY 7, 1998 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

**NOTE: Not more that 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
ORIGINAL MONUMENT: POST SET BY JOSEPH WAMPLER, U.S. DEPUTY SURVEYOR, MAR., 1826. WITNESSED AS: LYNN, 14", S46E, 7 1/2 LINKS; LYNN, 8", S67 1/2W, 28 LINKS

- 1) INGHAM CO. ROAD GRID MAP CALLS FOR STONE, AND GLASS. 12" OAK, SW.63.3'; 12" OAK, SW, 66.3'; FW ELM SE, 61.9'
- 2) LIBER 2, PAGE 183 OF CORNERS, DATED JULY 28, 1972, F.N. WHITE P.S. NO. 12034. "FOUND 1/4" REINFORCEMENT BAR; 1" BELOW BLACKTOP SURFACE ON FENCE LINES TO NORTH AND SOUTH."  
SET NAIL IN NORTH SIDE 18" WALNUT S40E 37.85' (FOUND WALNUT)  
1/2" IRON IN FENCE TO SOUTH SOUTH 33.08' (FOUND 1/2" REBAR)  
SET NAIL IN EAST SIDE 20' WALNUT N45W 43.65' (FOUND WALNUT)
- 3) P.A. 132 SURVEY RECORDED IN LIBER 4, PAGE 267, DATED MAR. 11, 1981 BY G. YOUNG NO. 17640. HE CITED THE SAME WITNESSES AND CORNER AS RECORDED IN THE L.C.R.C. ABOVE.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
EXCAVATED THIS CORNER IN OCTOBER OF 1997 AND FOUND A VERY RUSTED BOLT SPIKE OVER A 1/4" REBAR BELOW THE SURFACE OF AND ONE FOOT NORTH OF THE C/L OF HOLT ROAD. EXCAVATED DOWN TO THE CLAY ROAD BED AND FOUND A CIRCLE OF GLASS BELOW THE SPIKE 2.5' DEEP. POSITION WAS ON LINE WITH THE FENCES TO THE NORTH AND SOUTH AS DESCRIBED BY SURVEYOR WHITE. RETURNED TO SITE ON JULY 2, 1998 AND FOUND HOLT ROAD HAD BEEN RESURFACED AND A MONUMENT BOX HAD BEEN SET OVER THE SPIKE AND WAS ENCASED WITH CONCRETE. ACCEPTED THE POSITION OF THE BOLT SPIKE AND CIRCLE OF GLASS AS FOUND IN OCTOBER 1997 AND SET AN ALUMINUM MAGNETIC DISK OVER THE SPIKE AND ADDED A 3" LAYER OF CONCRETE TO HOLD IT IN PLACE ON JULY 7, 1998.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
3" ALUMINUM MAGNETIC DISK STAMPED P.A. 345, P.S. NO. 18994 OVER BOLT SPIKE IN MONUMENT BOX.  
SET NAIL & TAG #18994 ON NE/SIDE OF 28" WALNUT, AZ. 140°, 38.48 FEET  
SET NAIL & TAG #18994 ON S/SIDE OF 14" ELM, AZ. 69°, 56.16 FEET  
SET NAIL & TAG #18994 ON NE/SIDE OF 28" WALNUT, AZ. 313°, 43.70 FEET  
SET NAIL & TAG #18994 ON N/SIDE OF 16" WALNUT, AZ. 107°, 135.51 FEET  
CORNER OF ANGLE IRON ANCHOR POST, NORTH, 24.9'  
1/2" REBAR IN FENCE LINE, SOUTH, 33.04 FEET

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													



Signed by Ron Helsel Date Aug. 8, 1998  
Surveyor's Michigan License No. 18994

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

Liber 9 Page 331

For corners in

INGHAM Located in: WHEATFIELD TOWNSHIP Corner Code #  
(County) \_\_\_\_\_

1. Public Land Survey T 3N R 1E \_\_\_\_\_ A-6  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_  
T \_\_\_\_\_ R \_\_\_\_\_

2. Property Controlling S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
in Section S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

3. Miscellaneous S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
Property in Sec. S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

**FILED**

98047702  
09/18/1998 13:20:25  
REGISTER OF DEEDS  
Paula Johnson  
INGHAM COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													

I, RON HELSEL, in a field survey on July 7, 1998 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:  
CORNER WAS NOT SET IN ORIGINAL GOVERNMENT SURVEY.

1) LIBER 4, PAGE 99 OF CORNERS, DATED 6-9-77, G. YOUNG, P.S. # 17640, "SET CORNER ON SECTION LINE AT A PRORATED DISTANCE BETWEEN SW CORNER SECTION 19 & NW CORNER OF SECTION 18, T3N, R1E, SET 1/2" X 24" REROD AND CAP."  
# 16 NAIL & CAP IN 15" OAK, N30E, 87.15' (FOUND)  
# 16 NAIL & CAP IN P.P., S85E, 144.13' (FOUND)

#16 NAIL & CAP IN 15" OAK, S20E, 153.96' (FOUND)

2) P.A. 132 SURVEY, LIBER 3, PAGE 19, DATED 6-18-1977 BY G. YOUNG CALLED FOR THE SAME WITNESSES AND CORNER AS ABOVE.

3) P.A. 132 SURVEY, LIBER 7, PAGE 233-235, DATED 5-13-1993, BY D. LOHR P.S. #30090, "FOUND 1/2" IRON 2" DEEP, 5.5 FT. WEST OF C/L MERIDIAN RD.

RESET N&T 30090 24" OAK, N25E, 87.15' (FOUND)

FD. NAIL P.POLE, S85E, 144.13' (FOUND)

RESET N&T 30090 20" OAK, S11E, 153.96' (FOUND)

SET N&T 30090 12" OAK, S05W, 250.00' (FOUND)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

FOUND A 1/2" IRON BAR 5.5 FEET WEST OF THE CENTERLINE OF MERIDIAN ROAN ALONG WITH ALL OF THE WITNESSES DESCRIBED BY SURVEYORS LOHR AND YOUNG ABOVE. EXCAVATED DOWN THROUGH 3 LAYERS OF ASPHALT ABOUT 3 FEET TO THE CLAY ROAD BED. FOUND A 1/2" X 24" REROD UNDER THE 1/2" SMOOTH BAR AT THE ROAD SURFACE. DID NOT FIND ANY EVIDENCE OF A PREVIOUS CORNER. TRAVERSED FROM THE NORTHWEST CORNER OF SECTION 18 TO THE SOUTHEAST CORNER OF SECTION 13, T3N, R1W, (ALAIEDON TWP.) AND FOUND THE CORNER TO BE 0.24' NORTH OF THE MID POINT BETWEEN A-5 AND A-7 AND 0.06' WEST OF A LINE BETWEEN M-6 AND M-5 OF THE ALAIEDON TWP. STANDARD LINE. ACCEPTED THE POSITION OF THE 1/2" REROD AND SET A 3/4" BY 24" FORM PIN AND DISK STAMPED P.A. 345, P.S. NO. 18994 OVER TOP OF THE REROD AND ON THE STANDARD LINE IN A MONUMENT BOX.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
3/4" X 24" FORM PIN AND INGHAM CO. DISK

SET NAIL AND TAG NO. 18994 ABOVE A NAIL AND TAG NO. 30090, E/SIDE 18" OAK, AZ. 185°, 249.95 FEET

SET NAIL AND TAG NO. 18994 ABOVE A NAIL AND TAG NO. 30090, W/SIDE 18" HICKORY, AZ. 171°, 218.81 FEET

SET NAIL AND TAG NO. 18994 ABOVE A NAIL AND TAG NO. 30090, W/SIDE 22" OAK, AZ 25°, 87.04 FEET

FOUND NAIL & TAG NO. 30090 S/SIDE POWER POLE, AZ. 93°, 144.08 FEET

SET NAIL AND TAG NO. 18994 W/SIDE 18" OAK, AZ. 169°, 153.97 FEET

MEASURED 2634.31 FEET TO A-5

MEASURED 2634.79 FEET TO A-7



Signed by Ron Helsel

Date Aug. 7, 1998

Surveyor's Michigan License No. 18994

**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

Liber 9 Page 241

For corners in

INGHAM Located In: Corner Code #  
 (County) WHEATFIELD TOWNSHIP

1. Public Land Survey T 3N R 1E A-5  
 T \_\_\_\_\_ R \_\_\_\_\_  
 T \_\_\_\_\_ R \_\_\_\_\_  
 T \_\_\_\_\_ R \_\_\_\_\_

2. Property Controlling S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
 in Section S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

3. Miscellaneous S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_  
 Property in Sec. S \_\_\_\_\_ T \_\_\_\_\_ R \_\_\_\_\_

**FILED**

970041160  
 10/20/1997 13:41:43  
 REGISTER OF DEEDS  
 Paula Johnson  
 INGHAM COUNTY, MI

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

I, RON HELSEL, in a field survey on JUNE 4, 1997  
 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

**NOTE:** Not more that 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:  
 ORIGINAL MONUMENT: POST SET BY J. WAMPLER, U.S. DEPUTY SURVEYOR, MAR. 3, 1826. WITNESSED AS: SUGAR 6", S66E, 6 1/2 LINKS  
 LYNN 33", N59E, 46 LINKS

- 1) VOL. 2, PAGE 153, DATED JAN. 10-11, 1878, COUNTY SURVEYOR A. P. DRAKE IN A SURVEY OF SEC. 12 OF ALAIEDON TWP. GAVE A CALLING OF NORTH, 23.4 CHAINS FROM THE SE CORNER OF SECTION 12 TO THE NW CORNER OF SECTION 18, WHEATFIELD TOWNSHIP. HE DID NOT IDENTIFY OR GIVE WITNESSES TO THIS CORNER.
- 2) A L.C.R.C. WAS RECORDED IN LIBER 4, PAGE 99, DATED JUNE 9, 1977 BY G. YOUNG NO. 17640. "SET CORNER ON SECTION LINE 23.4 CHAINS NORTH OF NE CORNER OF SECTION 13, T3N, R1W." WITNESSED AS:  
 #16 NAIL & CAP IN 40" MAPLE N10E, 279.41' (FOUND TREE)  
 #16 NAIL & CAP IN ANCHOR POST S50E, 38.02' (GONE)  
 SOUTH EDGE OF SOUTH DIRECTION SIGN POST N80W, 26.08' (FOUND NEW SIGN POST)
- 3) A SURVEY WAS RECORDED IN LIBER 3, PAGE 19 BY SURVEYOR YOUNG DATED JUNE 9, 1977. THE SURVEY CREATED A PARCEL IN THE SW 1/4 OF SECTION 18 OF WHEATFIELD TOWNSHIP AND THE CORNER WAS ESTABLISHED IN 2-A ABOVE WAS DETERMINED IN ORDER TO PRORATE THE WEST 1/4 CORNER OF SECTION 18.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:  
 EXCAVATED AND FOUND 1/2" IRON BAR AND CAP NO. 17640 8" BELOW THE SURFACE OF MERIDIAN ROAD. EXCAVATED DOWN THROUGH A SECOND LAYER OF ASPHALT AND GRAVEL TO THE CLAY SUB BASE. NATURAL GROUND TO THE WEST OF MERIDIAN ROAD IS ABOUT 3 FOOT HIGHER AND THE INTERSECTION APPEARS TO BE A CUT AREA. THE POSITION OF THE IRON BAR IS 8' FOOT SOUTH OF THE C/L OF NOBLE ROAD TO THE EAST AND ON C/L OF MERIDIAN ROAD. CORNER IN VERY CLOSE ACCORD TO BEING ON LINE WITH D-5 AND C-5 EXTENDED FROM THE EAST. ACCEPTED SURVEYOR YOUNG'S METHOD OF RE-ESTABLISHING AN OBLITERATED CORNER. REPLACED 1/2" BAR WITH 3/4" X 24" FORM PIN AND CAP STAMPED P.A. 345, P.S. NO. 18994 AND SET MONUMENT BOX TO ROAD GRADE.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
 3/4" FORM PIN AND CAP 8' SOUTH CENTERLINE OF NOBLE ROAD ON CENTERLINE OF MERIDIAN ROAD IN MONUMENT BOX.  
 SET 1/2" X 18" IRON BAR AND CAP NO. 18994 5.5' WEST OF THE W/EDGE OF MERIDIAN ROAD, 6" DEEP, AZ. 273 DEG., 17.38 FEET  
 SET 1/2" X 18" IRON BAR AND CAP NO. 18994 8.5' EAST OF SE'LY ROAD ARC, 6" DEEP, AZ. 122 DEG., 33.92 FEET  
 SET NAIL AND TAG NO. 18994 E/SIDE 9" ELM, AZ. 349 DEG., 93.57 FEET  
 SET NAIL AND TAG NO. 18994 W/SIDE 45" MAPLE, AZ. 12 DEG., 278.95 FEET



Signed by Ron Helsel  
 Surveyor's Michigan License No. 18994

Date SEPT. 27, 1997

P.A. 345 INGHAM COUNTY  
 PEER APPROVED 9/25/97 M

**LAND CORNER RECORDATION CERTIFICATE**  
 Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Liber **9** Page **243**

INGHAM Located In: WHEATFIELD TOWNSHIP  
 (County) Corner Code #

**FILED**

970041162  
 10/20/1997 13:41:46  
 REGISTER OF DEEDS  
 Paula Johnson  
 INGHAM COUNTY, MI

1. Public Land Survey	T <u>3N</u> R <u>1E</u>	<u>C-5</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

I, RON HELSEL, in a field survey on JUNE 4, 1997, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

**NOTE: Not more that 4 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
 ORIGINAL MONUMENT: POST SET BY J. WAMPLER, U.S. DEPUTY SURVEYOR, MAR. 3, 1826. BEECH 11", S20 1/2E, 18 LINKS

SUGAR 8", S58W, 18 LINKS MARGINAL NOTE WITNESSED THIS CORNER AS:  
 SUGAR 2", S45E, 67 LINKS; SUGAR 2", S57W, 87 LINKS. (SEE BELOW)

1) VOL. 2, PG. 5, SEPT. 26, 1862 COUNTY SURVEYOR T.J. BROWN USED THIS CORNER BUT DID NOT IDENTIFY OR WITNESS IT. A MARGINAL NOTE DATED APRIL 12, 1884 BY CO. SURVEYOR G. EDWIN STATES CALLED FOR A 15" STONE, WITNESSED AS SUGAR 2", S43E, 67 LINKS; SUGAR 2", S57W, 87 LINKS.

2) A I.C.R.C. ROAD GRID MAP CALLED FOR IRON, STONE AND BRICK ; 16" MAPLE, S.E. 44.6'; 34" MAPLE, S.W. 58.0'; ANCHOR POST, SOUTH, 26.61'; 1 1/4" IRON, SOUTH, 33.0'

3) A L.C.R.C. WAS RECORDED IN LIBER 4, PAGE 101 ALONG WITH A SURVEY RECORDED IN LIBER 3, PAGES 84-85 BY R. LESTER P.S. NO. 18998, DATED 9-29-1977. " EXCAVATED AND FOUND PLOW POINT 1.0' BELOW SURFACE ON CENTERLINE OF NOBLE ROAD ON OLD OCCUPATION LINE NORTH AND SOUTH." HE NOTED THAT SEVERAL OF THE I.C.R.C WITNESSES WERE IN CLOSE ACCORD. "LEFT PLOW POINT AND COVERED WITH MONUMENT BOX"

(CONTINUED ON BACK)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


EXCAVATED AND FOUND PLOW POINT OVER STONE AND BRICK 1.0 FEET NORTH ON C/L OF NOBLE ROAD ON FENCE LINE TO THE SOUTH. FOUND M.D.S.H. TAG ON WEST SIDE OF 14" WOOD ANCHOR POST AS ONLY REMAINING WITNESS. ACCEPTED THE POSITION OF THE PLOW POINT AND STONE AS FAITHFUL PERPETUATION OF THE CORNER. SET 3/4" X 24" FORM PIN AND CAP STAMPED P.A. NO. 345, P.S. NO. 18994 OVER THE PLOW POINT AND RAISED THE MON. BOX TO THE SURFACE OF NOBLE ROAD

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

3/4" FORM PIN AND CAP IN MONUMENT BOX 1.0 FEET NORTH OF C/L NOBLE ROAD:  
 SET 1/2" X 18" IRON BAR AND CAP NO. 18994 12" NORTH OF N/EDGE OF BIT. PAVEMENT, AZ. 04 DEG., 10.59 FEET.  
 SET 1/2" X 18" IRON BAR AND CAP NO. 18994 12" NORTH OF N/EDGE OF BIT. PAVEMENT, AZ. 80 DEG., 43.96 FEET.  
 FOUND M.D.S.H. NAIL AND TAG W/SIDE 14" WOOD ANCHOR POST, AZ. 186 DEG., 26.53 FEET.  
 SET NAIL AND TAG NO. 18994 NW/SIDE 5" HICKORY, AZ. 235 DEG., 41.88 FEET.  
 SET NAIL AND TAG NO. 18994 W/ SIDE 5" ELM, AZ. 192 DEG., 41.82 FEET.

Signed by Ron Helsel  
 Surveyor's Michigan License No. 18994

Date SEPT. 27, 1977

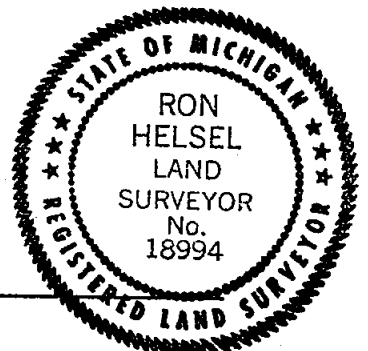

P.A. 345 INGHAM COUNTY  
 PEER APPROVED 9/25/97 M

A. (CONTINUED)

NAIL & TAG IN NORTH SIDE 36" MAPLE, S.W., 56.20' (GONE)  
NAIL & TAG IN N.E. SIDE 20" MAPLE, S.E. 44.50' (GONE)  
M.D.S.H. NAIL & TAG IN WEST SIDE CORNER POST, SOUTH, 25.95' (FOUND)

4) SURVEYS WERE RECORDED IN LIBER 4, PAGE 914, DATED 7-16-84 AND IN LIBER 4, PAGE 1252, DATED 2-25-86, BY SURVEYOR G. YOUNG NO. 17640. HE CALLED FOR A PLOW POINT IN A MON. BOX WITH THE SAME WITNESSES AS 2-A ABOVE.

5) AN UNRECORDED SURVEY BY L. BRYAN, NO. 25832, DATED DEC. 3, 1992, JOB NO. 92-B-39874 CALLED FOR THE PLOW POINT AND THE SAME WITNESSES AS 2-A ABOVE.

HTED